

ORBEA



AVANT M30.

SE TROUVE DANS CES COULEURS:



CARBONE-ANTHRACITE
(SATIN)



BLANC-NOIR (BRILLANT)

SPÉCIFICATIONS ET OPTIONS


CADRE	Orbea Avant carbon OME, monocoque, tapered 1-1/8" - 1,5", PF 86mm, internal cable routing, EC/DC compatible, 130 rear spacing, 27,2mm seat tube.
FOURCHE	Avant OME carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts.
PLATEAU DE PEDALIER	FSA Gossamer Compact MegaExo 34x50t
DIRECTION	FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings
CINTRE	FSA Omega Compact
POTENCE	Orbea OC-II
MANETTES	Shimano 105 5800
FREINS	Orbea OC-II
PIGNON	Shimano 105 5800 11-32t 11-Speed
DERAILLEUR ARRIÈRE	Shimano 105 5800 GS
DERAILLEUR AVANT	Shimano 105 5801
CHAINE	Fsa Team Issue
ROUES	Vision Team 30 Comp Clincher
PNEUS	Kenda Kriterium 700x25 60TPI
PEDALE	N/A
TIGE SELLE	Orbea OC-II Carbon 27.2x350mm
SELLE	Prologo K3 STN size 141 mm
RUBAN DE GUIDON	Bar Tape

GÉOMÉTRIE

TAILLE	47	49	51	53	55	57	60
1 - SEAT_TUBE	410	440	470	490	510	530	560
2 - TOP_TUBE	516.2	525.8	535.2	548.1	563.4	579.6	594.8
3 - HEAD_TUBE	113	132	150.1	165	187.6	205	226
4 - CHAIN_STAY	414	414	414	414	418	418	418
5 - BB_HEIGHT				269			
6 - BB_DROP				72.5			
7 - WHEELBASE	978	986.6	992.9	993.7	1005.3	1014	1023.8
8 - HEAD_ANGLE	71.2°	71.4°	71.8°	72°	72.5°	73°	73°
9 - SEAT_ANGLE	73.5°	73.5°	73.5°	73.5°	73.2°	73°	73°
10 - STANDOVER	708.5	720.5	754	774.5	797	817.5	841.5
11 - REACH	363	367.1	371	378.4	383.4	391.7	400
12 - STACK	517.4	535.8	554.8	572.8	596.1	614.6	636.5
13 - FORK_LENGTH				375			
14 - OFFSET	53	53	53	43	43	43	43

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

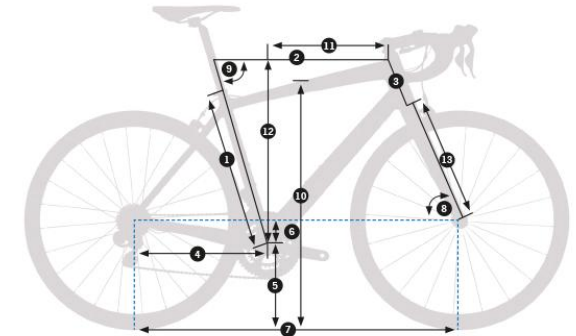

* La dimension du guidon est centre-centre