

ORBEA



ORCA M20-PRO 19.

SE TROUVE DANS CES COULEURS:



BLEU-BRILLANT ROUGE
(BRILLANT)



BLANC-ROUGE (MAT)



VERT-BLEU (MAT)



GRAPHITE-NOIR

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Orca carbon OMP, monocoque, tapered 1-1/8" - 1,5", PF 86mm, powermeter compatible, internal cable routing, EC/DC compatible, 130mm rear spacing, 27,2mm seat tube.
FOURCHE	Orca OMP carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts.
PLATEAU DE PEDALIER	Shimano Ultegra R8000 34x50t
	FSA Gossamer Pro 32x48t
	Shimano Ultegra R8000 39x53t
	Rotor Aldhu 36x52t
	Rotor 2INpower DM 34x50t
	Rotor 2INpower DM 36x52t
DIRECTION	FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings
CINTRE	FSA Energy Compact
	FSA K-Force Compact
	Vision Metron 4D Compact
POTENCE	FSA Energy
	FSA OS-99 CSI
MANETTES	Shimano Ultegra R8000
FREINS	Shimano Ultegra R8000
PIGNON	Shimano Ultegra R8000 11-28t 11-Speed
	Shimano Ultegra R8000 11-25t 11-Speed
	Shimano Ultegra R8000 11-30t 11-Speed
	Shimano Ultegra R8000 11-32t 11-Speed (RD GS)
DERAILLEUR ARRIÈRE	Shimano Ultegra R8000 SS
	Shimano Ultegra RD-R8000 GS
DERAILLEUR AVANT	Shimano Ultegra R8000
CHAINE	KMC X11-EL
ROUES	Mavic Aksium Elite Clincher
	Mavic Ksyrium Black UST Clincher
	Mavic Ksyrium Elite Black UST + Tires
	Fulcrum Racing 400 Clincher
	Fulcrum Racing Quattro Carbon
	Vittoria Elusion Carbon 30
PNEUS	Vittoria Rubino Foldable 700x25 60TPI G+
PEDALE	N/A
TIGE SELLE	FSA SL-K SB20 27.2x350mm Di2 compatible


GÉOMÉTRIE

TAILLE	47	49	51	53	55	57	60
1 - SEAT_TUBE	410	440	470	490	510	530	560
2 - TOP_TUBE	514.8	520.55	537.9	548.5	563.7	576	590
3 - HEAD_TUBE	104	112	130	145	165	182	207.1
4 - CHAIN_STAY	405	405	405	405	408	408	408
5 - BB_HEIGHT	271.5						
6 - BB_DROP	70						
7 - WHEELBASE	969.6	967.58	986.92	984.77	996.32	1003.89	1012.53
8 - HEAD_ANGLE	71°	71.4°	71.8°	72.1°	72.5°	73°	73.5°
9 - SEAT_ANGLE	73.5°	73.5°	73.5°	73.5°	73.2°	73.2°	73.2°
10 - STANDOVER	708	726	751	771	791	807	835
11 - REACH	365	372	380	385	391	398	404
12 - STACK	506	515	533	552	572	590	616
13 - FORK_LENGTH	375						
14 - OFFSET	53	53	53	43	43	43	43

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

* La dimension du guidon est centre-centre

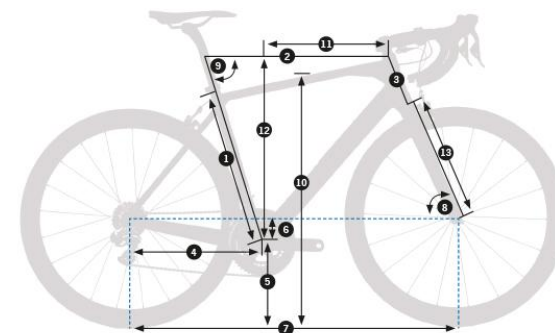

FSA S-LK Offset SB0 27,2x350/400mm

FSA K-Force Offset SB0 27,2x350/400mm

FSA K-Force Offset SB25 27,2x350/400mm

SELLE Prologo Kappa RS STN size 143mm

Prologo Scratch-2 Tirox size 143 mm Black

Prologo Dimension T4.0 143mm Black

Selle Italia SLR Kit Carbonio Black

RUBAN DE GUIDON Velo Anti-Slippery/Shock Proof

FREIN ARRIÈRE Shimano Ultegra R8000

--
