



AVANT H60-D.

SE TROUVE DANS CES COULEURS:



BLANC-GRIS (BRILLANT)



SPEED SILVER (MAT)




VERT MILITAIRE-DORÉ (BRILLANT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Avant Hydro disc, hydroformed triple butted aluminium, HS 1,5" ICR, BB 68mm - BSC English, Thru Axle 12x142mm rear, thread M12x2 P1, Internal Cable Routing, SP 27,2mm, MMS system.
FOURCHE	Orbea carbon fork 2021, aluminum steerer, 1-1/8" head tube
PLATEAU DE PEDALIER	Shimano Claris R2000 34x50t
DIRECTION	Acros Alloy 1-1/2" Internal Cable Routing
CINTRE	OC1 Road, reach 80mm, drop 125mm OC1 Road, riser 15mm, reach 70mm, drop 125mm
POTENCE	OC1 31.8mm interface -6°
MANETTES	Shimano Claris ST-R2000
FREINS	Tektro MD-C550 Mechanical Disc
PIGNON	Shimano HG50 11-32t 8-Speed
DERAILLEUR ARRIÈRE	Shimano Claris RD-R2000-GS
DERAILLEUR AVANT	Shimano Claris FD-R2000-F
CHAÎNE	KMC X8
ROUES	Orbea wheel: Cosra with 12mm E-Thru hubset Shimano RS470 28H
PNEUS	Vittoria Zafiro V Rigid bead 700x28c
TIGE SELLE	Alloy 27.2 Offset 20
SELLE	Selle Royal Seta RS Prologo Akero AGX STN size 155mm
GUIDOLINE	Orbea Eva
BLOCAGE AVANT	Orbea Thru Axle 12x100mm M12x2 P1 Solid
BLOCAGE ARRIÈRE	Orbea Thru Axle 12x142mm M12x2 P1 Solid

GÉOMÉTRIE

TAILLE	47	49	51	53	55	57	60
1 - SEAT_TUBE	420	445	470	495	520	545	575
2 - TOP_TUBE	511	526	539	553	569	586	597
3 - HEAD_TUBE	122	141	161	180	201	221	241
4 - CHAIN_STAY	425						
5 - BB_HEIGHT	276	276	276	278	278	278	278
6 - BB_DROP	75	75	75	73	73	73	73
7 - WHEELBASE	989	996	1004	1006	1020	1029	1038
8 - HEAD_ANGLE	71°	71.5°	71.9°	72.4°	72.6°	72.8°	73°
9 - SEAT_ANGLE	74.5°	74°	73.75°	73.5°	73.5°	73°	73°
10 - STANDOVER	415	444	470	502	520	550	568
11 - REACH	365	370	375	380	390	395	400
12 - STACK	525	545	565	585	605	625	645
13 - FORK_LENGTH	370						
14 - OFFSET	48	48	48	43	43	43	43

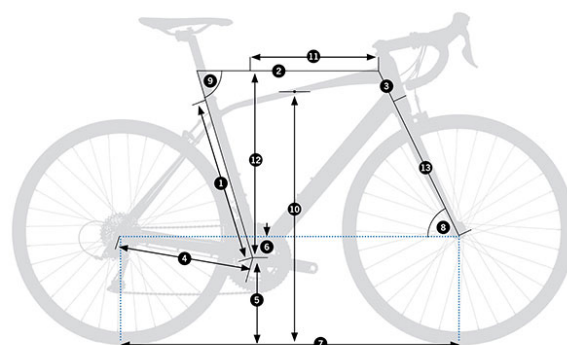

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
47	170	90	380
49	170	100	400
51	170	100	420
53	170	100	420
55	172	110	420
57	172	110	440
60	175	120	440

* La dimension du guidon est centre-centre