



GAIN D20.

SE TROUVE DANS CES COULEURS:



BLAC-GRIS (BRILLANT)



NOIR-TITANE (MAT)




VERT PASTEL (BRILLANT)-
NOIT (MAT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Gain Hydro 6061 Hydroform Aluminum 2021, ICR cable routing, Forged BB, safety screw, 135x9 QR, Flat Mount disc mount, 700x40 maximum tyre, 1" 1/2 semiintegrated head set, 41x86,5 Pressfit bottom bracket.
FOURCHE	Gain Hydro carbon fork, full carbon, 1-1/8" - 1.5" tapered head tube compatible, 700x40 maximum tyre, flat mount disc mount, Thru axle 12x100mm
PLATEAU DE PEDALIER	Shimano Ultegra R8000 34x50t
DIRECTION	Acros Alloy 1-1/2" Internal Cable Routing
CINTRE	OC2 Road, reach 80mm, drop 125mm OC1 Road, riser 15mm, reach 70mm, drop 125mm
POTENCE	OC1 31.8mm interface -6°
MANETTES	Shimano ST-8020
FREINS	Shimano R8070 Hydraulic Disc
PIGNON	Shimano Ultegra R8000 11-32t 11-Speed Shimano Ultegra R8000 11-28 11-Speed
DERAILLEUR ARRIÈRE	Shimano Ultegra R8000 GS
DERAILLEUR AVANT	Shimano Ultegra R8000
CHAINE	KMC X11
ROUES	Ready GR OC2 Carbon 42 Tubeless Ready
PNEUS	Hutchinson Fusion 5 Performance TLR 700x30 Vittoria Rubino Pro IV G2.0 TLR 700x28c
TIGE SELLE	OC 27.2 Offset 0, for integrated light
SELLE	Selle Royal Asphalt GR Fizik Antares R5 Versus EVO Regular
ÉCLAIRAGE AVANT	Front position light, on display holder, COB Led, On/Off, 60 Lumen, ECE50.
ÉCLAIRAGE ARRIÈRE	Lezyne FENDER STVZO seatpost mounting 11 lumens
MOTEUR	Ebikemotion X35 Plus 25kmh
BATTERIE	Ebikemotion 36V/6.9A 248Wh ANT+
ÉCRAN	OC monochrome ANT+ LEV
GUIDOLINE	Orbea Anti-Slippery/Shock Proof
CHARGEUR	Ebikemotion X35
REMOTE1	Ebikemotion iWoc ONE
BLOCAGE AVANT	Orbea Thru Axle 12x100mm M12x2 P1 Hollow

GÉOMÉTRIE

TAILLE	XS	S	M	L	XL
1 - SEAT_TUBE	460	485	515	545	575
2 - TOP_TUBE	507	530	547	571	589
3 - HEAD_TUBE	97	122	146	172	196
4 - CHAIN_STAY			420		
5 - BB_HEIGHT			267		
6 - BB_DROP			74		
7 - WHEELBASE	988	1002	1017	1036	1050
8 - HEAD_ANGLE	71	71.5	72	72	72.5
9 - SEAT_ANGLE	75	74.5	74.5	74	74
10 - STANDOVER	752	776	803	829	856
11 - REACH	366	377	388	399	410
12 - STACK	525	550	575	600	625
13 - FORK_LENGTH			400		
14 - OFFSET			50		
15 - WHEEL_SIZE			682		

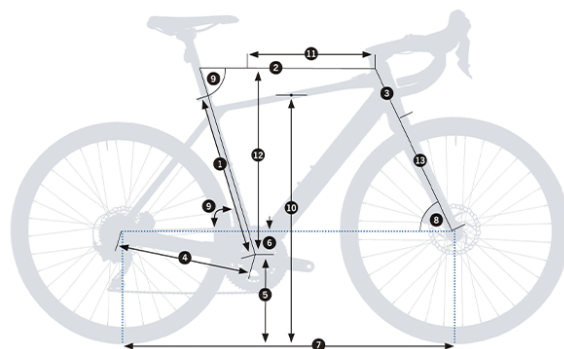

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
XS	170	90	400
S	170	100	420
M	170	110	420
L	172	110	440
XL	175	120	440

* La dimension du guidon est centre-centre