



OIZ H30.

SE TROUVE DANS CES COULEURS:



GRIS SOURIS
(MAT-BRILLANT)



NOIR (MAT-BRILLANT)-ICE
GREEN (BRILLANT)



ORANGE MAGMA- NOIR
(BRILLANT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Oiz Hydro High Polished, Alloy link, Boost, PF BB, UFO2, I-Line shock
AMORTISSEUR	Fox i-line DPS Performance 120mm Remote Push-Unlock Evol custom tune 190x45mm
FOURCHE	Fox 32 Float Rhythm 120 Remote Push-Unlock QR15x110
PLATEAU DE PEDALIER	Shimano MT511 32t
DIRECTION	Acros Alloy 1-1/8 - 1-1/2" Integrated
CINTRE	OC1 Flat 31.8mm 740mm
POTENCE	OC1 31.8mm interface -7°
MANETTES	Shimano Deore M6100 I-Spec EV
FREINS	Shimano M6100 Hydraulic Disc
PIGNON	Shimano CS-M6100 10-51t 12-Speed
DERAILLEUR ARRIÈRE	Shimano Deore M6100 SGS Shadow Plus
CHAINE	Shimano M6100
ROUES	Orbea OC1 25c Tubeless Ready DT Swiss X 1900 Spline 25c CL TL 15/110mm +Maxxis TLR Tires
PNEUS	Maxxis Ikon 2.20" FB 60 TPI Dual Maxxis Ardent Race 2.2" (F) / Ikon 2.2" (R) TLR
PEDALE	
TIGE SELLE	Alloy 31.6x400mm Offset 0 OC2 Dropper 31.6mm 125mm travel OC2 Dropper 31.6mm 150mm travel
SELLE	Selle Royal Seta Sport


GÉOMÉTRIE

TAILLE	S-TR	M-TR	L-TR	XL-TR	S-XC	M-XC	L-XC	XL-XC
1 - SEAT_TUBE	405	432	470	520	405	432	470	520
2 - TOP_TUBE	567	596	610	643	564	593	617	641
3 - HEAD_TUBE	90	95	105	120	90	95	105	120
4 - CHAIN_STAY	435							
5 - BB_HEIGHT	334	334	334	334	327	327	327	327
6 - BB_DROP	40	40	40	40	47	47	47	47
7 - WHEELBASE	1101	1131	1155	1181	1094	1123	1148	1173
8 - HEAD_ANGLE	68°	68°	68°	68°	69°	69°	69°	69°
9 - SEAT_ANGLE	74°	74°	74°	74°	75°	75°	75°	75°
10 - STANDOVER	724	739	749	756	722	732	742	749
11 - REACH	387	425	446	466	407	435	456	476
12 - STACK	593	598	608	622	586	591	600	614
13 - FORK_LENGTH	524	524	524	524	504	504	504	504
14 - OFFSET	44							

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
S	170	60	740
M	175	70	740
L	175	70	740
XL	175	90	740

* La dimension du guidon est centre-centre

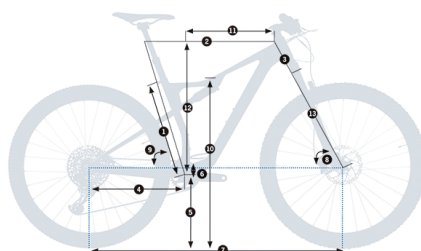

Women Kit: OC Grips
OD29mm&Selle Italia
SLR Boost SuperFlow

Fizik Taiga S-alloy rail

GUIDE-CHAÎNE Orbea OC chainguide

BLOCAGE AU GUIDON

OC Squidlock 3-position

--
