



ORCA M20.

SE TROUVE DANS CES COULEURS:



CARBONE RAW- TITANE
(BRILLANT)



ORANGE ÉLECTRIQUE
MÉTALLISÉ (BRILLANT)- NOIR
(MAT)




BLANC- IRIS (BRILLANT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Orca carbon OMR Disc, monocoque construction, HS 1,5", BB 386mm, powermeter compatible, Rear Thru Axle 12x142mm, thread M12x2 P1, Speed release compatible dropout, Internal Cable Routing, EC/DC compatible
FOURCHE	Orbea carbon fork 2021, aluminum steerer, 1-1/8" head tube
PLATEAU DE PEDALIER	Shimano Ultegra R8000 34x50t Shimano Ultegra R8000 39x53t FSA Powerbox Alloy 34x50t FSA Powerbox Alloy 36x52t
DIRECTION	Acros Alloy 1-1/2" Internal Cable Routing
CINTRE	OC1 Road, riser 15mm, reach 70mm, drop 125mm OC1 Road, reach 80mm, drop 125mm
POTENCE	OC1 31.8mm interface -6°
MANETTES	Shimano ST-8020
FREINS	Shimano R8070 Hydraulic Disc
PIGNON	Shimano 105 R7000 11-30t 11-Speed Shimano 105 R7000 11-32t 11-Speed
DERAILLEUR ARRIÈRE	Shimano Ultegra R8000 GS
DERAILLEUR AVANT	Shimano Ultegra R8000
CHAÎNE	KMC X11-EL
ROUES	Orbea wheel: Ready 19 with 12mm E-Thru hubset Shimano RS470 28H Vision 40 SC Disc CB TLR CL + Vittoria Rubino IV TLR 700x28c FULCRUM Racing 800 DB FULCRUM Racing 700 DB
PNEUS	Vittoria Zafiro V Rigid bead 700x28c Vittoria Rubino IV G2.0 TLR 700x25c Vittoria Rubino IV G2.0 TLR 700x28c
TIGE SELLE	OC2 Carbon 27.2 Offset 20 OC1 Carbon 27.2 Offset 0
SELLE	Selle Royal Seta RS Prologo Dimension T4.0 size143 mm Prologo Scratch-M5 Pas T2.0 size 140mm Selle Italia SLR Boost SuperFlow L Manganese Rail
GUIDOLINE	Orbea Eva
BLOCAGE AVANT	Orbea Thru Axle 12x100mm M12x2 P1 Solid
BLOCAGE ARRIÈRE	Orbea Thru Axle 12x142mm M12x2 P1 Solid

GÉOMÉTRIE

TAILLE	47	49	51	53	55	57	60
1 - SEAT_TUBE	440	460	480	500	520	540	570
2 - TOP_TUBE	510	523	535	548	560	576	590
3 - HEAD_TUBE	105	113	130	148	168	186	213
4 - CHAIN_STAY	408						
5 - BB_HEIGHT	267	267	267	269	269	269	269
6 - BB_DROP	72	72	72	70	70	70	70
7 - WHEELBASE	972	976	980	981	991	1002	1016
8 - HEAD_ANGLE	71°	71.5°	72.2°	72.8°	73°	73.2°	73.2°
9 - SEAT_ANGLE	74.5°	74°	73.7°	73.5°	73.5°	73.2°	73.2°
10 - STANDOVER	735	747	766	787	807	825	851
11 - REACH	367	372	377	382	388	395	401
12 - STACK	513	522	540	559	579	597	623
13 - FORK_LENGTH	370						
14 - OFFSET	48	48	48	43	43	43	43

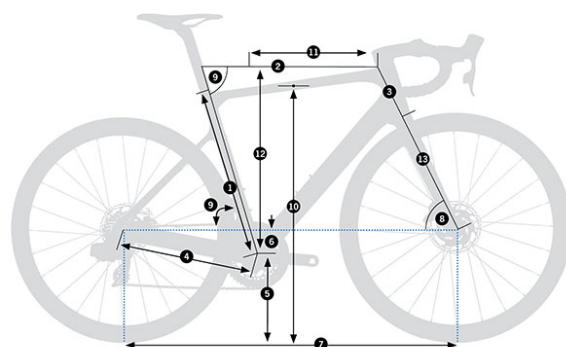

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

* La dimension du guidon est centre-centre

**KIT
TUBELESS**

Orbea Kit (2 x 44mm brass valve + 10m x rim tape)