



# TERRA M30.

SE TROUVE DANS CES COULEURS:



JAUNE-NOIR



ANTHRACITE GLITTER  
(BRILLANT) / NOIR (MAT)




NOIR-BRIGHT RED (MAT)

## SPÉCIFICATIONS ET OPTIONS

<b>CADRE</b>	Orbea Terra carbon OMP disc, monocoque construction, tapered 1-1/8" - 1,5", PF30, powermeter compatible, Thru Axle 12mm x 142mm rear, thread M12x P1.5, internal cable routing, EC/DC compatible, SP 27,2mm.
<b>FOURCHE</b>	Orbea Terra OMP carbon disc fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts Thru axle 12mm x 100m, thread M12xP1.5, MMS system
<b>PLATEAU DE PEDALIER</b>	Shimano GRX RX600 30x46t
<b>DIRECTION</b>	FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings
<b>CINTRE</b>	OC1 All Road, reach 80mm, drop 125mm, flare 12° OC1 Road, reach 80mm, drop 125mm OC1 Road, riser 15mm, reach 70mm, drop 125mm OC2 Road Carbon, reach 80mm, drop 125mm
<b>POTENCE</b>	OC1 31.8mm interface -6°
<b>MANETTES</b>	Shimano ST-RX600
<b>FREINS</b>	Shimano RX400 Hydraulic disc
<b>PIGNON</b>	Shimano 105 R7000 11-34t 11-Speed Shimano 105 R7000 11-30 11-speed Shimano 105 R7000 11-32t 11-Speed
<b>DERAILLEUR ARRIERE</b>	Shimano RD-RX810
<b>DERAILLEUR AVANT</b>	Shimano GRX RX810
<b>CHAINE</b>	Shimano HG 601
<b>ROUES</b>	Orbea wheel: Ready GR with 12mm E-Thru hubset Shimano RS470 28H Vision 40 SC Disc Carbon TLR CL FULCRUM Racing 800 DB FULCRUM Racing 700 DB FULCRUM Rapid Red 900 DB AFS
<b>PNEUS</b>	Vittoria Terreno Dry Gravel G2.0 TNT 700x38c Vittoria Rubino Pro IV G2.0 TLR 700x28c Hutchinson Fusion 5 Performance TLR 700x30
<b>TIGE SELLE</b>	OC2 Carbon 27.2 Offset 20 OC1 Carbon 27.2 Offset 0
<b>SELLE</b>	Prologo Akero AGX STN size 155mm Prologo Dimension T4.0 size 143 mm Prologo Scratch-M5 Pas T2.0 size 140mm Selle Italia SLR Boost SuperFlow L Manganese Rail
<b>GARDE-BOUE</b>	Orbea SKS 46S 700x45C Black
<b>GUIDOLINE</b>	Orbea Anti-Slippery/Shock Proof

## GÉOMÉTRIE

TAILLE	XS	S	M	L	XL
<b>1 - SEAT_TUBE</b>	460	510	554	590	630
<b>2 - TOP_TUBE</b>	531	543	555	570	585
<b>3 - HEAD_TUBE</b>	122	138	156	182	212
<b>4 - CHAIN_STAY</b>			430		
<b>5 - BB_HEIGHT</b>	283	283	285	285	288
<b>6 - BB_DROP</b>	70	70	68	68	65
<b>7 - WHEELBASE</b>	1017	1030	1043	1060	1078
<b>8 - HEAD_ANGLE</b>			70.5°		
<b>9 - SEAT_ANGLE</b>			73.5°		
<b>10 - STANDOVER</b>	764	796	828	858	893
<b>11 - REACH</b>	370	378	385	392	400
<b>12 - STACK</b>	545	560	575	600	625
<b>13 - FORK_LENGTH</b>			400		

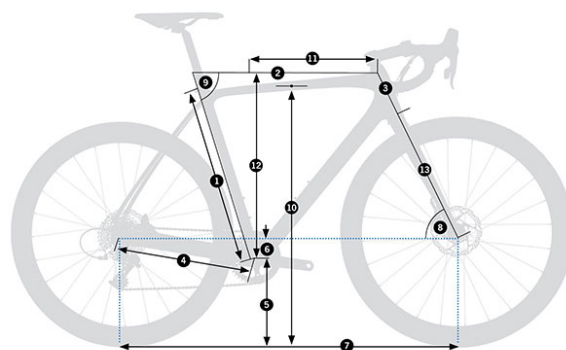

## ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
<b>XS</b>	170	90	400
<b>S</b>	170	100	420
<b>M</b>	172	110	420
<b>L</b>	172	110	440
<b>XL</b>	175	120	440

\* La dimension du guidon est centre-centre

---

<b>BLOPAGE AVANT</b>	Orbea Thru Axle 12x100mm M12xP1.5 Hollow
<b>BLOPAGE ARRIÈRE</b>	Orbea Thru Axle 12x142mm M12xP1.5 Hollow
<b>KIT TUBELESS</b>	Orbea Kit (2 x 44mm brass valve + 10m x rim tape)

---