



GAIN M30.

SE TROUVE DANS CES COULEURS:



SPEED SILVER (MAT)- NOIR (BRILLANT)



CORAIL (BRILLANT)- NOIR (MAT)




ICE GREEN (BRILLANT)- NOIR (MAT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Gain Carbon OMR monocoque structure, Integrated Seat clamp with integrated STVZO rear light, ICR cable routing, Forged BB, 135x9 QR, Flat Mount disc, 700x40 maximum tyre, 1" 1/2 semi head set, BB386 EVO.
FOURCHE	Gain OMR carbon fork, with 1-1/5 carbon steerer, 700x40 maximum tyre, flat mount disc mount, 12x100mm Thru Axle, with down tube aero integration.
PLATEAU DE PEDALIER	Shimano 105 R7000 34x50t
DIRECTION	Acros Alloy 1-1/2" Internal Cable Routing
CINTRE	OC2 Road, reach 80mm, drop 125mm OC1 Road, riser 15mm, reach 70mm, drop 125mm OC2 Road Carbon, reach 80mm, drop 125mm
POTENCE	Orbea ICR -8°
MANETTES	Shimano ST-7020
FREINS	Shimano R7070 Hydraulic Disc
PIGNON	Shimano 105 R7000 11-32t 11-Speed Shimano 105 R7000 11-28 11-Speed
DERAILLEUR ARRIÈRE	Shimano 105 R7000 GS
DERAILLEUR AVANT	Shimano 105 R7000
CHAÎNE	KMC X11
ROUES	FULCRUM E-Racing 900 OC2 Carbon 42 Tubeless Ready
PNEUS	Schwalbe ONE 30-622, 700x30c, Performance Line RaceGuard, TLE, ADDIX Vittoria Rubino Pro IV G2.0 TLR 700x28c Schwalbe ONE Perf 700x30c, RaceGuard, TLE, ADDIX, Classic Schwalbe ONE Perf 700x30c, RaceGuard, TLE, ADDIX, Black
TIGE SELLE	OC2 Carbon 27.2 Offset 20
SELLE	Selle Royal Asphalt GR Fizik Antares R5 Versus EVO Regular
ÉCLAIRAGE AVANT	Rear position light, on saddle clamp, COB Led, On/Off, 12 Lumen. STVZO
BATTERIE	Ebikemotion 36V/6.9A 248Wh ANT+
ÉCRAN	Ebikemotion Pulsar One monochrome ANT+ LEV
GUIDOLINE	Orbea Anti-Slippery/Shock Proof
CHARGEUR	Ebikemotion X35
REMOTE1	Ebikemotion iWoc ONE
BLOCAGE AVANT	Orbea Thru Axle 12x100mm M12x2 P1 Lite

GÉOMÉTRIE

TAILLE	XS	S	M	L	XL
1 - SEAT_TUBE	455	485	515	545	575
2 - TOP_TUBE	507	530	547	571	589
3 - HEAD_TUBE	95	120	146	172	196
4 - CHAIN_STAY			420		
5 - BB_HEIGHT	76	76	74	74	74
6 - BB_DROP	265	265	267	267	269
7 - WHEELBASE	986.14	1000.98	1021.5	1040.6	1048.97
8 - HEAD_ANGLE	71°	71.5°	72°	72°	72.5°
9 - SEAT_ANGLE	75°	74.5°	74.5°	74°	74°
10 - STANDOVER	708	785.73	819.5	839	872.68
11 - REACH	366	377	388	399	410
12 - STACK	525	550	575	600	625
13 - FORK_LENGTH			400		
14 - OFFSET			50		

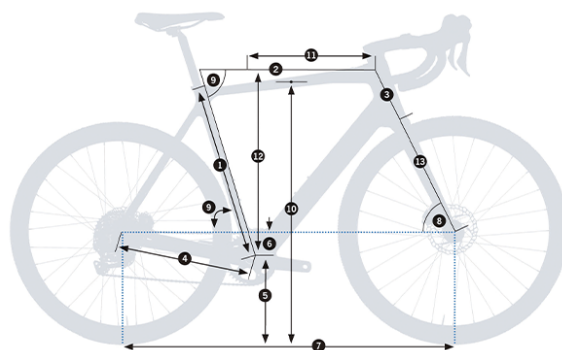

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
XS	170	90	400
S	170	100	420
M	170	100	420
L	172	110	440
XL	175	120	440

* La dimension du guidon est centre-centre