



TERRA M30 IX.

SE TROUVE DANS CES COULEURS:



JAUNE-NOIR



ANTHRACITE GLITTER
(BRILLANT) / NOIR (MAT)




NOIR-BRIGHT RED (MAT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Terra carbon OMP disc, monocoque construction, tapered 1-1/8" - 1,5", PF30, powermeter compatible, Thru Axle 12mm x 142mm rear, thread M12x P1.5, internal cable routing, EC/DC compatible, SP 27,2mm.
FOURCHE	Orbea Terra OMP carbon disc fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts Thru axle 12mm x 100mm, thread M12xP1.5, MMS system
PLATEAU DE PEDALIER	Shimano GRX RX600 40t
DIRECTION	FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings
CINTRE	OC1 All Road, reach 80mm, drop 125mm, flare 12° OC1 Road, reach 80mm, drop 125mm OC1 Road, riser 15mm, reach 70mm, drop 125mm OC2 Road Carbon, reach 80mm, drop 125mm
POTENCE	OC1 31.8mm interface -6°
MANETTES	Shimano ST-RX600
FREINS	Shimano RX400 Hydraulic disc
PIGNON	Shimano CS-M7000 11-40t 11-Speed
DERAILLEUR ARRIÈRE	Shimano RX812 GS
CHAÎNE	Shimano HG 601
ROUES	Orbea wheel: Ready GR with 12mm E-Thru hubset Shimano RS470 28H Vision 40 SC Disc Carbon TLR CL FULCRUM Racing 800 DB FULCRUM Racing 700 DB FULCRUM Rapid Red 900 DB AFS
PNEUS	Vittoria Terreno Dry Gravel G2.0 TNT 700x38c Vittoria Rubino Pro IV G2.0 TLR 700x28c Hutchinson Fusion 5 Performance TLR 700x30
TIGE SELLE	OC2 Carbon 27.2 Offset 20 OC1 Carbon 27.2 Offset 0
SELLE	Prologo Akero AGX STN size 155mm Prologo Dimension T4.0 size 143 mm Prologo Scratch-M5 Pas T2.0 size 140mm Selle Italia SLR Boost SuperFlow L Manganese Rail
GARDE-BOUE	Orbea SKS 46S 700x45C Black
GUIDE-CHAÎNE	Orbea OC chainguide
GUIDOLINE	Orbea Anti-Slippery/Shock Proof
BLOCAGE AVANT	Orbea Thru Axle 12x100mm M12xP1.5 Hollow

GÉOMÉTRIE

TAILLE	XS	S	M	L	XL
1 - SEAT_TUBE	460	510	554	590	630
2 - TOP_TUBE	531	543	555	570	585
3 - HEAD_TUBE	122	138	156	182	212
4 - CHAIN_STAY	430				
5 - BB_HEIGHT	283	283	285	285	288
6 - BB_DROP	70	70	68	68	65
7 - WHEELBASE	1017	1030	1043	1060	1078
8 - HEAD_ANGLE	70.5°				
9 - SEAT_ANGLE	73.5°				
10 - STANDOVER	764	796	828	858	893
11 - REACH	370	378	385	392	400
12 - STACK	545	560	575	600	625
13 - FORK_LENGTH	400				

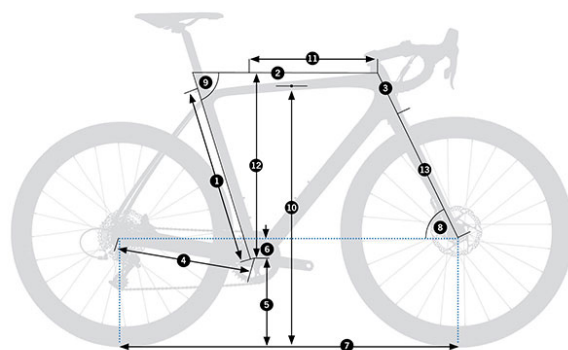

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
XS	170	90	400
S	170	100	420
M	172	110	420
L	172	110	440
XL	175	120	440

* La dimension du guidon est centre-centre

**BLOCAGE
ARRIÈRE**

Orbea Thru Axle 12x142mm M12xP1.5 Hollow

KIT TUBELESS

Orbea Kit (2 x 44mm brass valve + 10m x rim tape)
